

DURACOVER ™

Residential Lineset Cover Series

Impact resistant

UV resistant

Wide temperature range

Snap together Quick and easy

Multiple Colors Available

Less time & labor costs

- One person can quick and easily install
- Unique clips & tie wraps keep tubing in place during installation

ADDRESS
No.499 Hongcan Road, Hangzhou, China | Evanston, IL, USA

CONTACT
info@refcenter.cn

WEBSITE
refcenter.us | www.chinafore.com

Protect. Organize. Elevate the Installation.

Durable Material, Built for Outdoor Conditions

Made from high-quality PVC with UV-resistant and anti-oxidaton additives, featuring fire-resistant performance.

Designed to withstand intense sunlight, heavy rain, and long-term exposure to oil, condensate, and contaminants generated during A/C operation—helping protect refrigerant lines and reduce long-term maintenance costs.

Human-Centered Structure Design

Precision-engineered snap-fit locking system allows fast assembly without complex tools—just align and click.

Zip ties can be pre-installed to help neatly organize high-pressure lines, low-pressure lines, power cables, and condensate drains in one clean channel, significantly reducing installaton time and labor while improving overall installation efficiency.

Aesthetic Design, Paintable on Site

Minimalist, streamlined profile designed to blend seamlessly with modern architecture. Paintable in the field, allowing installers or builders to match the cover with the building facade for a clean, integrated appearance.

Multiple Sizes for Flexible Applications

Available in 3”, 4”, and 6” sizes to accommodate different air-conditioning systems and installation requirements—from mini-split units to multi-family residential unit setups.


Color Options

Offered in white, neutral, brown, and black, making it easy to match various exterior wall colors and housing styles for a balanced, professional finish. As DuraCovers are also paintable in the field, users can customize the colors based on their designs.

LINESET COVER

- Material: Weather resistant, UV stabilized, and Flame retardant PVC.
- Tested over 2,000 hours.
- Temperature Range: -4°F to 140°F (-20°C~60°C)
- Application: Wall mounted
- Fixing Screw: Stainless steel
- Sizes: 3”/4”/5.5”
- 3 year warranty

Example of piping fit-in

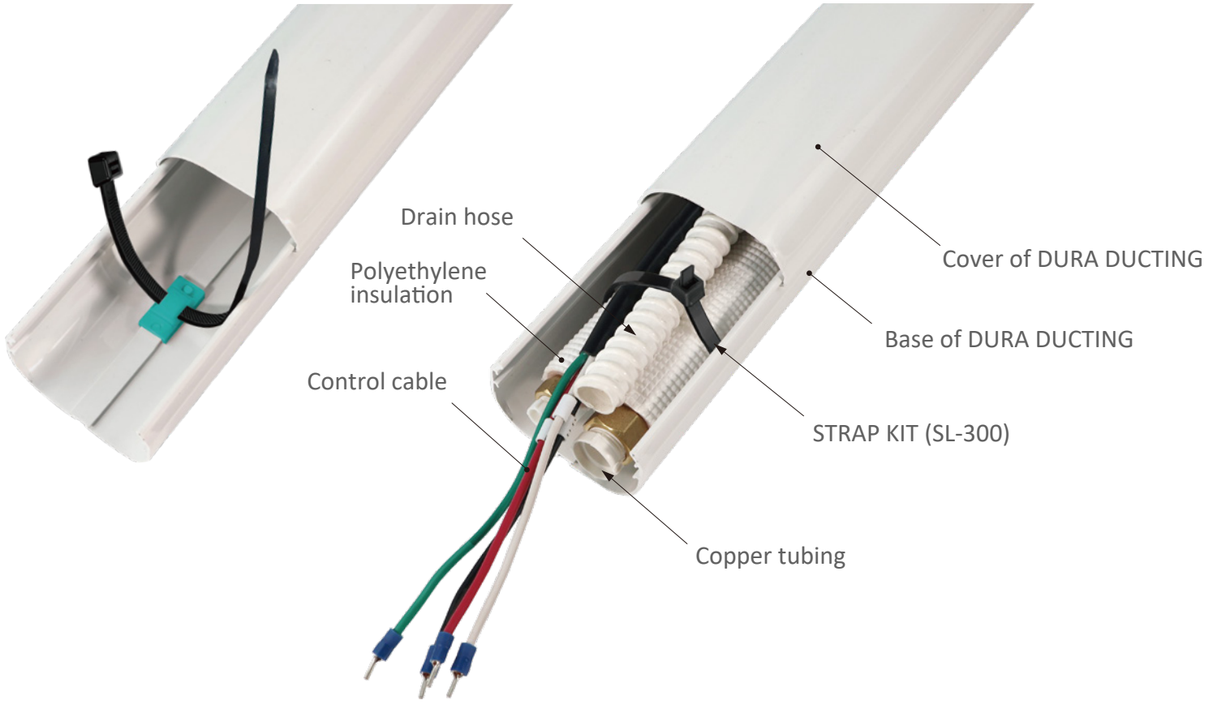

Refcenter®

Color Options

White
RAL 9003


Ivory
RAL 7044

Brown
RAL 6014


Black
RAL 9011




Example of applications

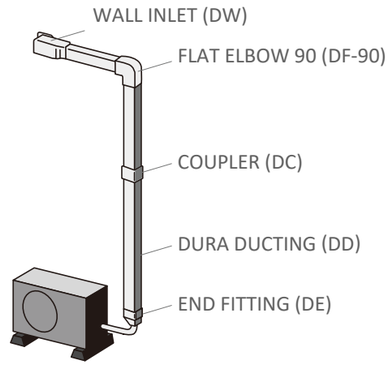


BASIC APPLICATION

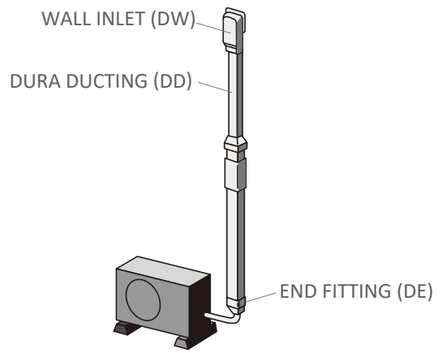

VERTICAL MULTIPLE RUN APPLICATION

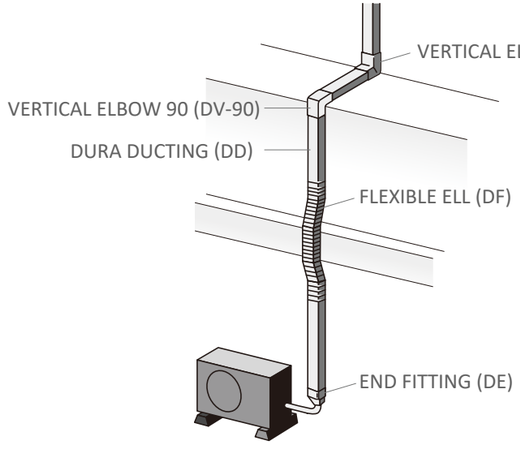


APPLICATION FOR OBSTACLES

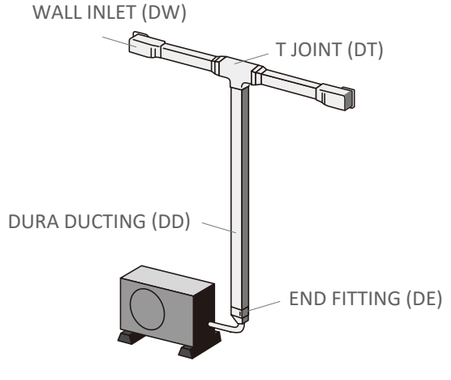

HORIZONTAL MULTIPLE RUN APPLICATION

DURA DUCTING










Code	Size (inch)	A (mm)	B (mm)	Color Options
DD-3	3”	76	61.5	○ ● ● ●
DD-4	4”	101	70	○ ● ● ●
DD-6	5.5”	140	80	○ ● ● ●

WALL INLET











Code	Size (inch)	A (mm)	B (mm)	C (mm)	Color Options
DW-3	3”	81.4	65.5	206	○ ● ● ●
DW-4	4”	107	74	223	○ ● ● ●
DW-6	5.5”	145	80	280	○ ● ● ●

BASE-FREE WALL INLET









Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	Color Options
DWA-3	3”	82	223	78	64	○ ● ● ●
DWA-4	4”	107	223	87	73	○ ● ● ●

Refcenter®

FLAT ELBOW 90









Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	Color Options
DF90-3	3”	65.5	81.4	127.4	127.4	○ ● ● ●
DF90-4	4”	74.1	107	151	151	○ ● ● ●
DF90-6	5.5”	84	146	190	190	○ ● ● ●

ADJUSTABLE FLAT ELBOW 45-90












Code	Size (inch)	A (mm)	B (mm)	C (mm)	Color Options
DAF-3	3”	81.4	65.5	58.5	○ ● ● ●
DAF-4	4”	107	74	58.5	○ ● ● ●

VERTICAL ELBOW 90










Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	Color Options
DV90-3	3”	81.4	65.5	100	100	○ ● ● ●
DV90-4	4”	107	74	117	117	○ ● ● ●
DV90-6	5.5”	145	84	146	146	○ ● ● ●


COUPLER

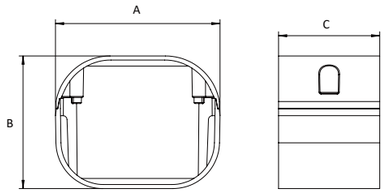



Code	Size (inch)	A (mm)	B (mm)	C (mm)	Color Options
DC-3	3”	81.4	65.5	50	○ ● ● ●
DC-4	4”	107	74	66	○ ● ● ●
DC-6	5.5”	146	84	90	○ ● ● ●


END FITTING

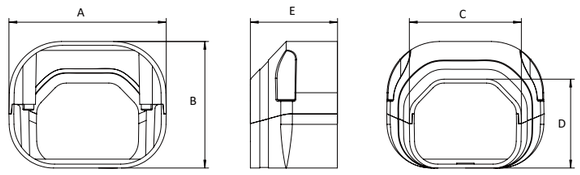



Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Color Options
DE-3	3”	81.4	65.5	58	46	45	○ ● ● ●
DE-4	4”	107	74	53.2	32	112	○ ● ● ●
DE-6	5.5”	146	84	53	32	150	○ ● ● ●

SOFFIT INLET

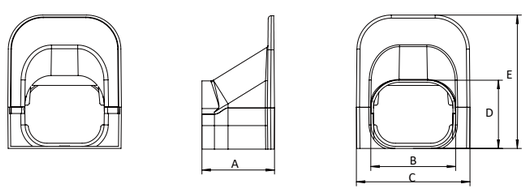




Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Color Options
DS-3	3”	69.6	81.4	109	65.5	128	○ ● ● ●
DS-4	4”	69.6	107	135	74	136.5	○ ● ● ●
DS-6	5.5”	69.6	146	174	84	147	○ ● ● ●

Refcenter®


T JOINT

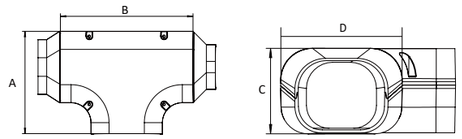




Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	Color Options
DT-4	4”	153.4	199	74	107	○ ● ● ●
DT-6	5.5”	196	250	84	146	○ ● ● ●


REDUCER

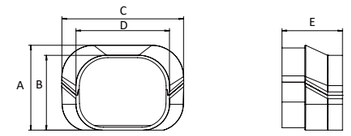

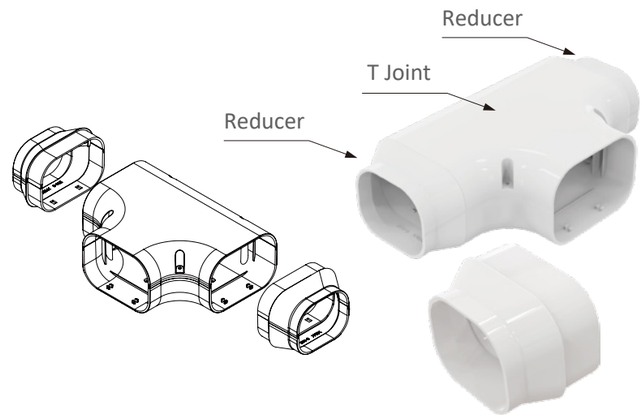

Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Color Options
DR-4-3	4”- 3”	74	65.5	107	82	53	○ ● ● ●
DR-6-4	5.5”- 4”	84	74	146	107	62	○ ● ● ●

FLEXIBLE ELL

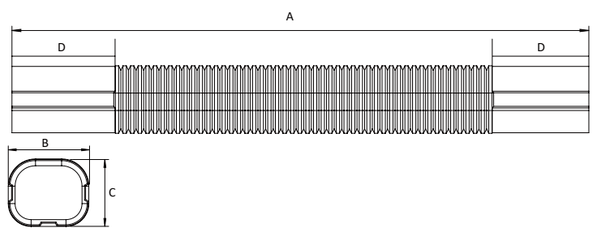



Code	Size (inch)	A (mm)	B (mm)	C (mm)	D (mm)	Color Options
DF-3	3”	530	82	69	87	○ ● ● ●
DF-4	4”	800	106	76	70	○ ● ● ●
DF-6	5.5”	800	146	86	80	○ ● ● ●